




# EURO 3000 Passengers

Diesel-Electric Locomotives

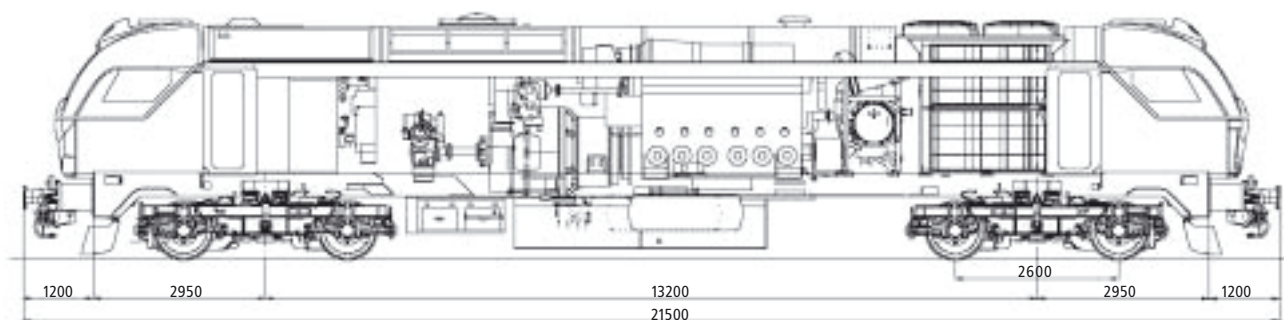

### GENERAL CHARACTERISTICS

<b>Axle arrangement:</b>	<b>Bo'Bo'</b>
<b>Gauge:</b>	<b>1435 mm(opt 1668)</b>
<b>Loading gauge:</b>	<b>UIC 505-1</b>
<b>Weight:</b>	<b>85 t</b>
<b>Axle load:</b>	<b>21,3 t</b>
<b>Maximum speed:</b>	<b>200 km/h</b>
<b>Starting tractive effort:</b>	<b>178 kN</b>
<b>Continuous rating:</b>	<b>101 kN</b>
<b>Cabs:</b>	<b>Two, Air-Conditioned</b>
<b>Coupler:</b>	<b>UIC type</b>
<b>Crash:</b>	<b>prEN15227</b>
<b>Fuel tank:</b>	<b>3000 l (OPT. 4000 l)</b>
<b>HEP:</b>	<b>400 kW</b>
<b>Multiple unit:</b>	<b>Yes (27 pin)</b>
<b>Emissions:</b>	
- Noise:	<b>TSI Conventional Rolling Stock</b>
- Exhaust:	<b>EU97/68 Stage IIIA</b>


Diesel engine	
Manufacturer	EMD
Model	12-710 G3C-U2
Power rating	2390 kW
Number of cylinders	12
Rated speed	926 rpm

Brake equipment	
Pneumatic	UIC Electropneumatic
Dynamic brake	OPT.
Blending feature	OPT.
Wheel slide protection	YES
Compressor:	
- Gardner Denver WLN G9B	
- 5910 l/min Displacement at 926 rpm	
Air capacity	1000 l

Electrical transmission	
Type	AC/DC
Traction motors	4 X D43
Main generator	AR 9 (OPT. AR 10)
Dynamic brake	700 Amp. (optional)
HEP	HE5

Bogie	
Frame	Fabricated steel
Axle	Hollow, EA1N
Wheel	965 mm, R7T
Suspensions:	
- Primary:	Coil springs
- Vertical, horizontal and Yaw dampers	
Traction motor	Frame mounted
Brake	Shoe and disk per wheel

### Performance Curves

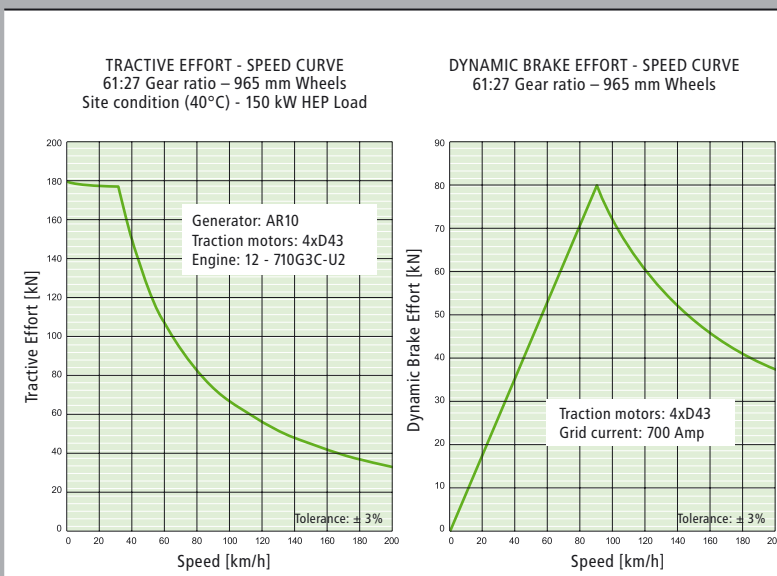

Vossloh Transportation Systems  
 Polígono Industrial del Mediterráneo  
 c/ Mitjera nº 6  
 46550 - Albuixech (Valencia) / España  
 Tel. +00 34 96 141 5000  
 Fax +00 34 96 141 5007  
[www.vossloh-transportation-systems.com](http://www.vossloh-transportation-systems.com)